

**Cargo Doors One End Standard  
Dry Freight ISO Cargo Container  
40'(L) x 8'(W) x 8'6"(H)**

**CNX-40ST**  
Cargo Doors One End Standard  
40' X 8' 6" Dry Freight ISO Cargo Container

**USED CARGO WORTHY  
U40ST**



**RECONDITIONED  
R40ST**




**ONE WAY NEW  
N40ST**



**PRODUCT FEATURES**

**STANDARD FEATURES**

- Corrugated steel sides, roof, and swing doors on (1) end
- Two-way forklift pockets (one way new containers only)
- 1 1/8" thick marine plywood floors, forklift tested to 16,000 lbs per 44 square inches
- Wall tie down steel lashing rings, 4,000 lbs. cap. each (40 total) tested at 6,000 lbs.
- Corner castings (8 total)

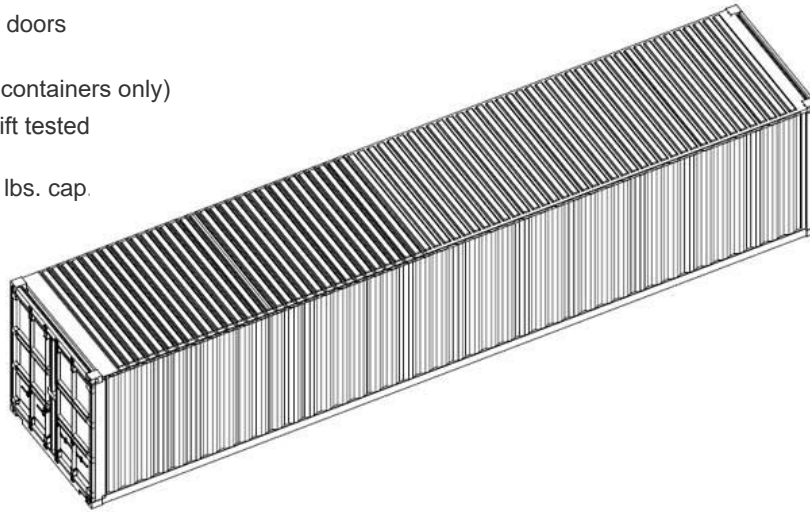

HIO # 338-0120.80

ALL NEW CONTAINERS ARE MANUFACTURED TO THE LATEST ISO STANDARD

CX40ST	LENGTH (+0/-6)		HEIGHT (+0/-5)		WIDTH (+0/-5)		DOOR OPENING (+0/-5)	
	Exterior	Interior	Exterior	Interior	Exterior	Interior	Height	Width
<b>Ft. in.</b>	40' 0"	39' 5 3/4"	8' 6"	7' 10 1/16"	8' 0"	7' 8 1/2"	7' 5 25/32"	7' 8 1/16"
<b>Metric</b>	12,192	12,033	2,591	2,289	2,438	2,350	2,280	2,338
	TARE WEIGHT		PAYLOAD		GROSS WEIGHT		CUBIC CAPACITY	
<b>Lbs.</b>	8,060		59,140		67,200		2,386 Cu. Ft.	
<b>Kgs.</b>	3,655		26,825		30,480		67.6 Cu.M.	

ALL DIMENSIONS AND WEIGHTS ARE NOMINAL AND SUBJECT TO MINOR VARIATIONS THAT MAY OCCUR DURING THE MANUFACTURING PROCESS

**40FT**

**ISO 9001**  
CERTIFIED QUALITY  
MANAGEMENT SYSTEM

